

# Blanket Warming Cabinet

2.3 ft<sup>3</sup> (0.07m<sup>3</sup>) interior capacity  
Glass door



37-94°C (98-200°F) range

Deluxe electronic control

24-hour timer  
(single programmable "off" period)

Plastic-coated interior surfaces

 **ENTHERMICS**  
Medical Systems

[www.enthermics.com](http://www.enthermics.com)

*Experience the Enthermics difference:  
Quality beyond comfort.*

# EC230 Blanket Warming Cabinet

## Specifications:

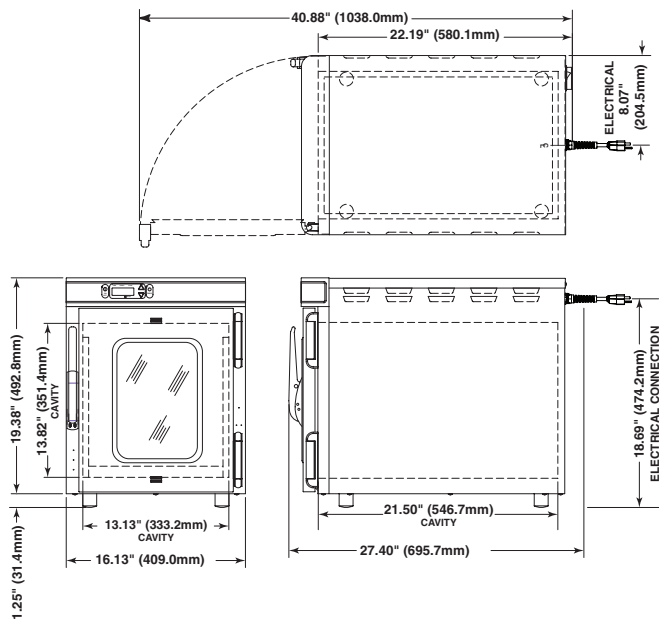
The single-chambered warming cabinet is constructed with 20 gauge stainless steel exterior casing and doors. Window door allows observation of inventory with the door closed. The cabinet is warmed using a low-heat-density electrothermal cable array mounted against the walls, eliminating the need for a heat circulating fan. The cabinet is equipped with one (1) white, epoxy-coated blanket support assembly. The cabinet is furnished with four (4) 1-1/4" (31mm) non-skid rubber feet.







## Special Information:

- Right-hand door swing is standard. Left-hand door is available as a special order.
- Stacking combinations listed under Options and Accessories. When ordering a combination of units to stack:
  1. Indicate top and bottom placement.
  2. Order one set of stacking hardware.

## Control:

The chamber is controlled by one (1) electronic control which consists of a four digit L.E.D. display, on/off key, heat indicator L.E.D., increase and decrease keys, built-in lock-out feature and a series of prompt sequence indicators. The electronic control can easily be set to operate in Fahrenheit or Celsius and has an adjustable temperature range of 37 - 94°C (98 - 200°F). Timer key allows the user to program the control to automatically turn on and off at a selected time once during a 24 hour period. In the event of a power failure, the cabinet will remember its programming and begin to operate as before when power is restored. A warming shut-off system, separate from the electronic control, prevents overheating.



Capacity and Weights	
Interior Capacity	2.3 cubic feet (c. 0.07m <sup>3</sup> )
Net Weight	79 lb (36 kg)
Ship Weight	85 lb (39 kg) est.
Electrical	
120 V.A.C. 50/60 Hz, 1ph 600 Watts, 5.0 Amps	 NEMA 5-15P 15A - 125V Plug Hospital Grade 
230 V.A.C. 50/60 Hz, 1ph 750 Watts, 3.3 Amps	 BS 1363 Plug (UK only) 
	 CEE 7/7 220-230V Plug 
Options and Accessories	
Casters*, 3" (76mm)	14227
Casters*, 5" (127mm)	4007
Leg Kit, 6" (152mm)	5205
Stacking Hardware	
EC230 over EC230	5007142
EC230 over EC230ℓ	5009284
Window Door Assembly, Left Hand	504163
*Platform (E5089) must be ordered as a base when ordering casters or legs for this unit.	



W164 N9221 Water Street • PO Box 443  
Menomonee Falls, WI 53052-0443  
Phone 262.251.8356 • 800.862.9276  
Fax 262.251.7067  
Email [generalinfo@enthermics.com](mailto:generalinfo@enthermics.com)