

EC770

Blanket Warming Cabinet

7.7 ft³ (0.2m³) interior capacity
Glass door

37-94°C (98-200°F) range

Deluxe electronic control

24-hour timer
(single programmable "off" period)

Plastic-coated interior surfaces



Shown with optional
full-perimeter rubber bumper

 **ENTHERMICS**
Medical Systems

www.entermics.com

*Experience the Entermics difference:
Quality beyond comfort.*

EC770 Blanket Warming Cabinet

Specifications:


The single-chambered warming cabinet is constructed with 20 gauge stainless steel exterior casing and doors. Window door allows observation of inventory with the door closed. The cabinet is warmed using a low-heat-density electrothermal cable array mounted against the walls, eliminating the need for a heat circulating fan. The cabinet is equipped with one (1) white, epoxy-coated blanket support assembly and one (1) center shelf. The cabinet is furnished with one (1) set of 5" (127mm) heavy duty casters, two with locking brake.

Special Information:

- Right-hand door swing is standard. Left-hand door is available as a special order.
- Pass-through design is available.
- Stacking combinations listed under Options and Accessories. When ordering a combination of units to stack:
 - 1.) Indicate top and bottom placement.
 - 2.) Order one set of stacking hardware.
 - 3.) Bumper assembly should be ordered for lower unit in stack.

Control:

The chamber is controlled by one (1) electronic control which consists of a four digit L.E.D. display, on/off key, heat indicator L.E.D., increase and decrease keys, built-in lock-out feature and a series of prompt sequence indicators. The electronic control can easily be set to operate in Fahrenheit or Celsius and has an adjustable temperature range of 37 - 94°C (98 - 200°F). Timer key allows the user to program the control to automatically turn on and turn off once at a selected time during a 24 hour period. In the event of a power failure, the cabinet will remember its programming and begin to operate as before when power is restored. A warming shut-off system, separate from the electronic control, prevents overheating.

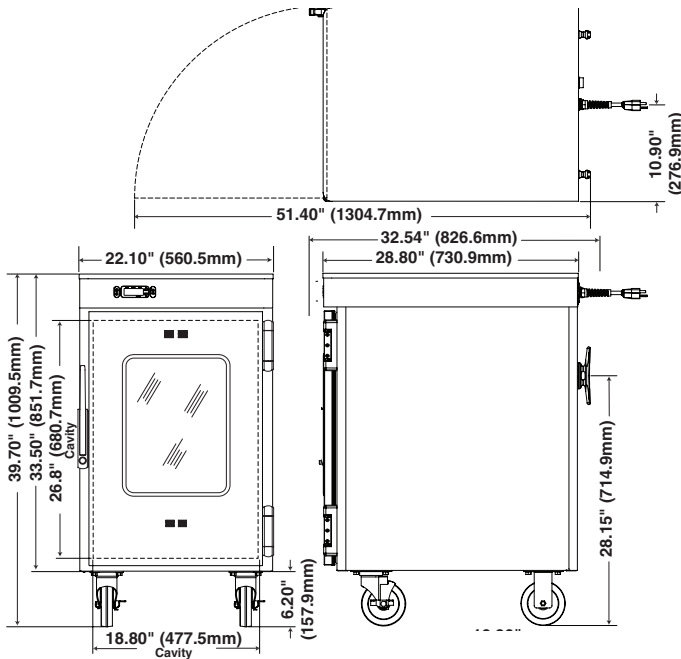

Capacity and Weights	
Interior Capacity	7.7 cubic feet (c. 0.2m ³)
Net Weight	178 lb (81 kg)
Ship Weight	259 lb (117 kg)
Electrical	
120 V.A.C. 60 Hz, 1ph 1000 Watts, 8.3 Amps	NEMA 5-15P 15A - 125V Plug Hospital Grade
230 V.A.C. 50 Hz, 1ph 950 Watts, 4.1 Amps	BS 1363 Plug (UK only) CEE 7/7 220-230V Plug
Options and Accessories	
Cylinder Lock for Door Handle	LK-22567
Full-Perimeter Rubber Bumper Assembly*	5010671
Leg Kit, 6" (152mm)	5010905
Stacking Hardware:*	
EC770 over EC770 or EC770 over EC770	5011588
Window Door Assembly, Left Hand	5009613
*Bumper assembly 44119 should be ordered for lower unit used in stacking.	



www.enthermics.com

W164 N9221 Water Street • PO Box 443
Menomonee Falls, WI 53052-0443
Phone 262.251.8356 • 800.862.9276
Fax 262.251.7067
Email generalinfo@enthermics.com